



# SIL-380 NT



## 72 Cell Monocrystalline PV Module

### INDUSTRY LEADING WARRANTY


All our products include an industry leading 25-year product workmanship and 30-year performance warranty.

### 35+ YEARS OF SOLAR INNOVATION

Leveraging over 35+ years of worldwide experience in the solar industry, Silfab is dedicated to superior manufacturing processes and innovations such as Bifacial and Back Contact technologies, to ensure our partners have the latest in solar innovation.

### NORTH AMERICAN QUALITY

Silfab is the largest and most automated solar manufacturer in North America. Utilizing premium quality materials and strict quality control management to deliver the highest efficiency, premium quality PV modules 100% made in North America.

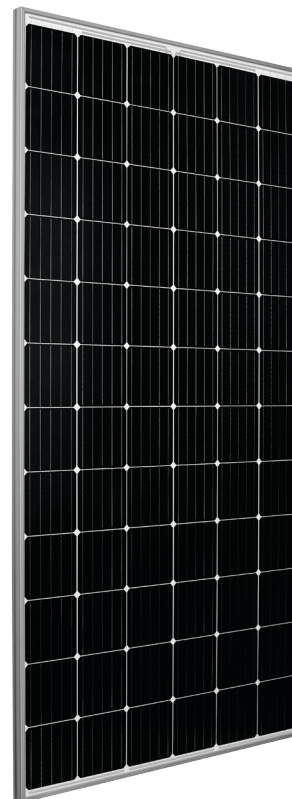

CHUBB®

\* Chubb provides error and omission insurance to Silfab Solar Inc.

### ■ BAA / ARRA COMPLIANT

Silfab panels are designed and manufactured to meet Buy American Act Compliance. The US State Department, US Military and FAA have all utilized Silfab panels in their solar installations.

### ■ LIGHT AND DURABLE

Engineered to accommodate low load bearing structures up to 5400Pa. The light-weight frame is exclusively designed for wide-ranging racking compatibility and durability.

### ■ LOWEST DEFECT RATE

Total automation ensures strict quality controls during the entire manufacturing process at our ISO certified facilities. 48.18 ppm as per December 2018.

### ■ DOMESTIC PRODUCTION

Silfab Solar manufactures our PV modules in two automated locations within North America. Our 300+ North American team is ready to help our partners win the hearts and minds of customers, providing customer service and product delivery that is direct, efficient and local.

### ■ SLEEK DESIGN

Sleek design in silver frame with white backsheet.

### ■ PID RESISTANT

PID Resistant due to advanced cell technology and material selection. In accordance to IEC 62804-1

Electrical Specifications		SIL-380 NT mono PERC	
Test Conditions		STC	NOCT
Module Power (Pmax)	Wp	380	287.6
Maximum power voltage (Vpmax)	V	39.25	35.32
Maximum power current (Ipmax)	A	9.69	8.14
Open circuit voltage (Voc)	V	47.95	44.36
Short circuit current (Isc)	A	10.29	8.43
Module efficiency	%	19.2	18.2%
Maximum system voltage (VDC)	V		1000
Series fuse rating	A		20
Power Tolerance	Wp		-0/+10

Measurement conditions: STC 1000 W/m<sup>2</sup> • AM 1.5 • Temperature 25 °C • NOCT 800 W/m<sup>2</sup> • AM 1.5 • Measurement uncertainty ≤ 3%  
 • Sun simulator calibration reference modules from Fraunhofer Institute. Electrical characteristics may vary by ±5% and power by -0/+10W.

Temperature Ratings		SIL-380 NT mono PERC	
Temperature Coefficient Isc	%/°C		0.03
Temperature Coefficient Voc	%/°C		-0.30
Temperature Coefficient Pmax	%/°C		-0.38
NOCT (± 2°C)	°C		45
Operating temperature	°C		-40/+85

Mechanical Properties and Components		SIL-380 NT mono PERC	
Module weight (± 1 kg)	kg		23.5
Dimensions (H x L x D; ± 1mm)	mm		1992 x 994 x 38
Maximum surface load (wind/snow)*	N/m <sup>2</sup>		2400 Pa rear load / 5400 Pa front load
Hail impact resistance			Ø 25 mm at 83 km/h
Cells			72 - Si mono PERC - 5 busbar - 158.75 x 158.75 mm
Glass			3.2 mm high transmittance, tempered, DSM anti-reflective coating
Backsheet			High durability, superior hydrolysis resistance, multi-layer dielectric film
Frame			Anodized Al
Bypass diodes			3 diodes, 20SQ040 (45V, 20A)
Cables and connectors			1200 mm Ø 5.7 mm (4 mm <sup>2</sup> ), MC4 compatible (refer to installation manual)
Junction Box			UL 3730 Certified, IP67 rated

Warranties		SIL-380 NT mono PERC	
Module product workmanship warranty			25 years**
Linear power performance guarantee			30 years
		≥ 97% end 1 <sup>st</sup> year	≥ 90% end 12 <sup>th</sup> year
		≥ 82% end 25 <sup>th</sup> year	≥ 80% end 30 <sup>th</sup> year

Certifications		SIL-380 NT mono PERC	
Product		ULC ORD C1703, UL 1703, IEC 61215, IEC 61730-1 and IEC 61730-2 Certified. FSEC and CEC listed. IEC 62716 Ammonia Corrosion, IEC 61701:201, Salt Mist Corrosion Certified	
Factory		UL Fire Rating: Type 1 (1500V) or Type 2 (1000V) or Type 1 on request ISO 9001:2015	



- Modules Per Pallet: 25
- Pallets Per Truck: 30
- Modules Per Truck: 750

\*Please refer to the Safety and Installation Manual for mounting specifications.

\*\*12 year extendable to 25 years subject to registration and conditions outlined under "Warranty" at [www.silfabsolar.com](http://www.silfabsolar.com).

⚠ Warning: Read the installation and User Manual before handling, installing and operating modules.

Third-party generated pan files from Fraunhofer-Institute for Solar Energy Systems ISE are available for download at: [www.silfabsolar.com/downloads](http://www.silfabsolar.com/downloads)

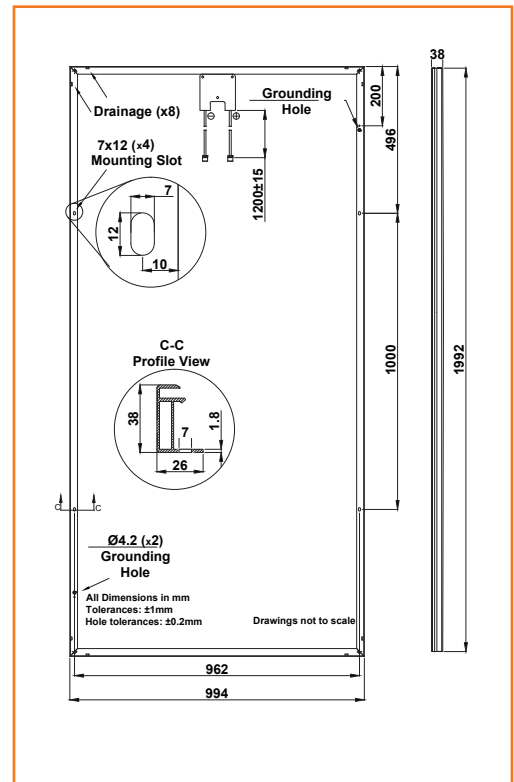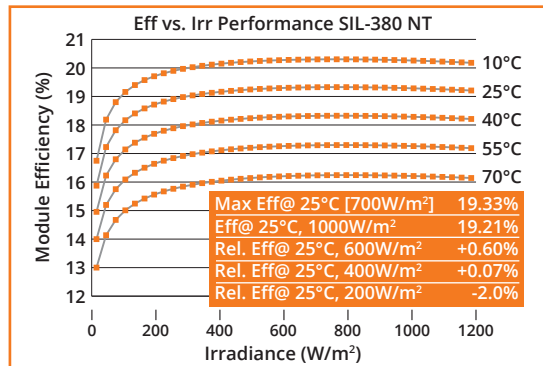

Silfab Solar Inc.  
 240 Courtneypark Drive East  
 Mississauga ON L5T 2Y3 Canada  
 Tel +1 905-255-2501 | Fax +1 905-696-0267  
 info@silfabsolar.com | www.silfabsolar.com



Silfab Solar Inc.  
 800 Cornwall Ave  
 Bellingham WA 98225 USA  
 Tel +1 360-569-4733

